

軽量化・省スペースに最適なお小頭シリーズ！

高い品質と強度保証を実現！




小頭キャップ 低頭小頭キャップ 極低頭小頭キャップ

◆小頭キャップは既製のボルトを再熱処理後に追加加工/黒染めを施すことで小頭ながら高い品質と強度保証を実現しています。

※低頭小頭及び極低頭は頭部切削加工/黒染めのみ
※引張試験/マイクロピッカーズ硬さ試験にて強度確認済み

小頭キャップ


■強度区分 8.8

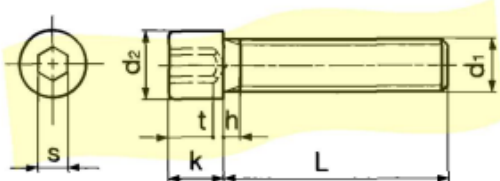

呼び	頭部外径 d2	頭部高さ k	六角穴対辺 s	六角穴長さ t (mm)	在庫寸法												
					5	6	8	10	12	16	20	25	30	35			
M3	4.5	3	2.5	1.3	●	●	●	●									
M4	5.5	4	3	2		●	●	●	●	●	●	●	●	●	●	●	●
M5	7	5	4	2.5			●	●	●	●	●	●	●	●	●	●	●
M6	8.5	6	5	3			●	●	●	●	●	●	●	●	●	●	●
M8	10	8	6	4				●	●	●	●	●	●	●	●	●	●
M10	13	10	8	5					●	●	●	●	●	●	●	●	●
M12	16	12	10	6						●	●	●	●	●	●	●	●

低頭小頭キャップ


■強度区分 8.8

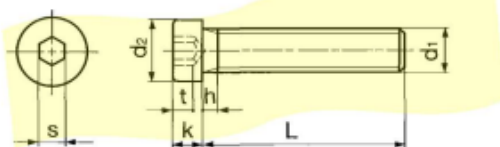

呼び	頭部外径 d2	頭部高さ k	六角穴対辺 s	六角穴長さ t	在庫寸法												
					5	6	8	10	12	16	20	25	30	35			
M3	4.5	2	2	1.5	●	●	●	●									
M4	5.5	2.8	2.5	2.3		●	●	●	●	●	●	●	●	●	●	●	●
M5	7	3.5	3	2.7			●	●	●	●	●	●	●	●	●	●	●
M6	8.5	4	4	3			●	●	●	●	●	●	●	●	●	●	●
M8	10	5	5	3.8				●	●	●	●	●	●	●	●	●	●
M10	13	6	6	4.5					●	●	●	●	●	●	●	●	●
M12	16	7	8	5						●	●	●	●	●	●	●	●

極低頭小頭キャップ

■強度区分 5.8(M3~M8)
4.8(M10)

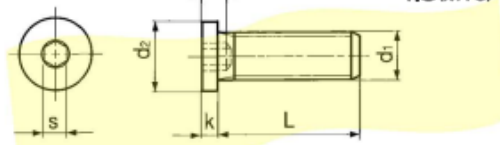

呼び	頭部外径 d2	頭部高さ k	六角穴対辺 s	六角穴長さ t (mm)	在庫寸法												
					5	6	8	10	12	16	20	25	30	35			
M3	4.5	1.3	1.5	2	●	●	●	●	●								
M4	5.5	1.5	2	2.5		●	●	●	●	●	●	●	●	●	●	●	●
M5	7	1.5	3	3			●	●	●	●	●	●	●	●	●	●	●
M6	8.5	1.5	3	4			●	●	●	●	●	●	●	●	●	●	●
M8	10	1.5	4	5				●	●	●	●	●	●	●	●	●	●
M10	13	1.5	5	e					●	●	●	●	●	●	●	●	●

詳細は担当営業までお気軽にご相談ください

